


- Unvergleichbar harte Spitzen
Incomparable hardened tips
- Beste Antihaft-Eigenschaften
Best non-stick-characteristics
- Für HF- und RF-Generatoren geeignet
Applicable for HF- and RF-generators



VPE / unit: 1
Umax: 500 Vp

SiTec

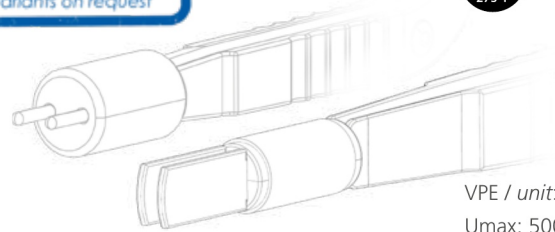

Spitzenlänge / Tip length = L2



Gesamtlänge / Total length = L1

Spitzenbreite tip width	Nadel / Needle	0.5 mm	1.0 mm	2.0 mm	2.0 mm Karo
Artikel-Nr. item code	-	-	95042AGN	-	-
L1	-	-	145 mm	-	-
L2	-	-	8 mm	-	-
Artikel-Nr. item code	95036AGN	95013AGN	95014AGN	-	-
L1	165 mm	165 mm	165 mm	-	-
L2	6 mm	8 mm	8 mm	-	-
Artikel-Nr. item code	95187AGN	95089AGN	95090AGN	95088AGN	-
L1	180 mm	180 mm	180 mm	180 mm	-
L2	6 mm	8 mm	8 mm	8 mm	-
Artikel-Nr. item code	95103AGN	95104AGN	95001AGN	95007AGN	95058AGN
L1	195 mm	195 mm	195 mm	195 mm	195 mm
L2	8 mm	8 mm	8 mm	8 mm	8 mm
Artikel-Nr. item code	95128AGN	95122AGN	95024AGN	95125AGN	-
L1	225 mm	225 mm	225 mm	225 mm	-
L2	8 mm	8 mm	8 mm	8 mm	-